

# ► Terazzo 0,2

## Characteristics

Terazzo is a granulated natural calcium carbonate used in building and construction industry. Along with distinguished optical properties and particle size distribution, Terazzo products boast excellent resistance to mechanical load and weather conditions.

### Physical characteristics

|                            |              |
|----------------------------|--------------|
| pH value (ISO 787/9)       | 9            |
| Moisture (ISO 787/2)       | max 0,2 %    |
| Bulk density (ISO 787/11)  | 1,2 g/ml     |
| DOP absorption (ISO 787/5) | 23,0 g/100 g |
| Hardness by Mohs           | 3            |


### Chemical analysis

|                                |        |
|--------------------------------|--------|
| CaCO <sub>3</sub>              | 98 %   |
| Fe <sub>2</sub> O <sub>3</sub> | 0,01 % |
| SiO <sub>2</sub>               | 0,02 % |
| Loss of ignition               | 42,8 % |

### Particle size distribution

|      |               |
|------|---------------|
| D98% | 220,0 µm      |
| D50% | 13,0 -15,0 µm |

Terazzo 0,2

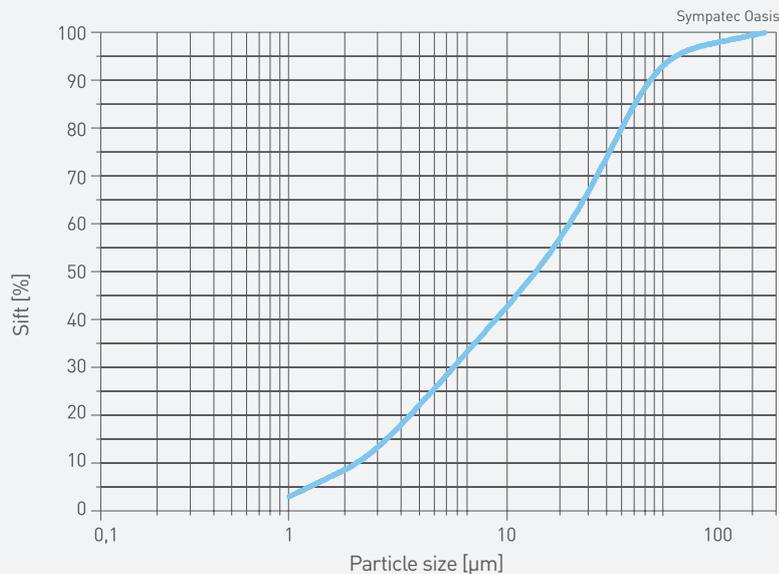

# ► Terazzo 0,5

## Characteristics

Terazzo is a granulated natural calcium carbonate used in building and construction industry. Along with distinguished optical properties and particle size distribution, Terazzo products boast excellent resistance to mechanical load and weather conditions.

### Physical characteristics

|                           |           |
|---------------------------|-----------|
| pH value (ISO 787/9)      | 9         |
| Moisture (ISO 787/2)      | max 0,2 % |
| Bulk density (ISO 787/11) | 1,4 g/ml  |
| Hardness by Mohs          | 3         |


### Chemical analysis

|                                |        |
|--------------------------------|--------|
| CaCO <sub>3</sub>              | 98 %   |
| Fe <sub>2</sub> O <sub>3</sub> | 0,01 % |
| SiO <sub>2</sub>               | 0,02 % |
| Loss of ignition               | 42,8 % |

### Particle size distribution

|          |          |
|----------|----------|
| R 0,5 mm | max 2 %  |
| R 0,1 mm | min 90 % |

Terazzo 0,5

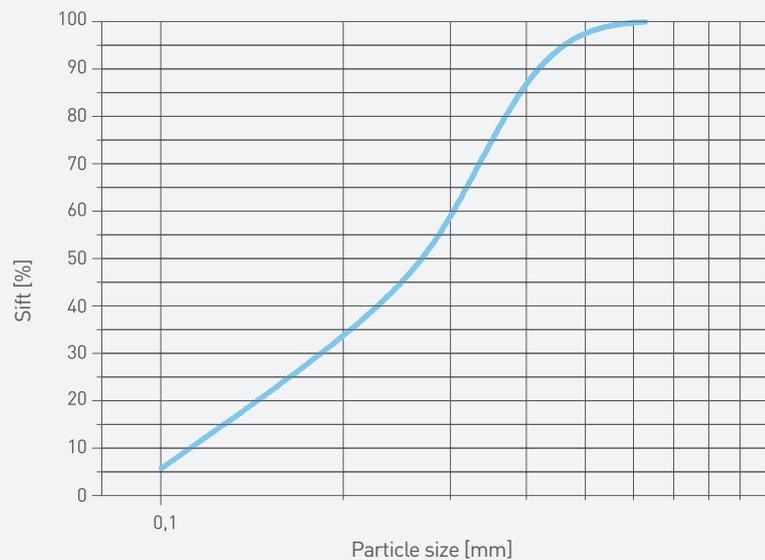

# ► Terazzo 1

## Characteristics

Terazzo is a granulated natural calcium carbonate used in building and construction industry. Along with distinguished optical properties and particle size distribution, Terazzo products boast excellent resistance to mechanical load and weather conditions.

### Physical characteristics

|                           |           |
|---------------------------|-----------|
| pH value (ISO 787/9)      | 9         |
| Moisture (ISO 787/2)      | max 0,2 % |
| Bulk density (ISO 787/11) | 1,4 g/ml  |
| Hardness by Mohs          | 3         |


### Chemical analysis

|                                |        |
|--------------------------------|--------|
| CaCO <sub>3</sub>              | 98 %   |
| Fe <sub>2</sub> O <sub>3</sub> | 0,01 % |
| SiO <sub>2</sub>               | 0,02 % |
| Loss of ignition               | 42,8 % |

### Particle size distribution

|          |           |
|----------|-----------|
| R 1,0 mm | max 1 %   |
| R 0,5 mm | 70 - 90 % |

Terazzo 1

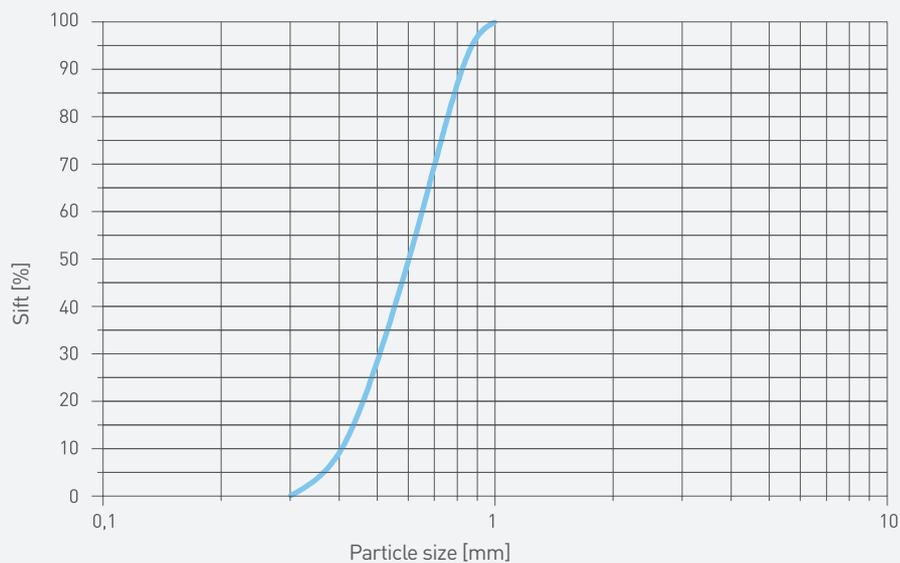

# ► Terazzo 1,5

## Characteristics

Terazzo is a granulated natural calcium carbonate used in building and construction industry. Along with distinguished optical properties and particle size distribution, Terazzo products boast excellent resistance to mechanical load and weather conditions.

### Physical characteristics

|                           |           |
|---------------------------|-----------|
| pH value (ISO 787/9)      | 9         |
| Moisture (ISO 787/2)      | max 0,2 % |
| Bulk density (ISO 787/11) | 1,4 g/ml  |
| Hardness by Mohs          | 3         |


### Chemical analysis

|                                |        |
|--------------------------------|--------|
| CaCO <sub>3</sub>              | 98 %   |
| Fe <sub>2</sub> O <sub>3</sub> | 0,01 % |
| SiO <sub>2</sub>               | 0,02 % |
| Loss of ignition               | 42,8 % |

### Particle size distribution

|          |           |
|----------|-----------|
| R 1,6 mm | max 1 %   |
| R 1,0 mm | 50 - 70 % |

Terazzo 1,5

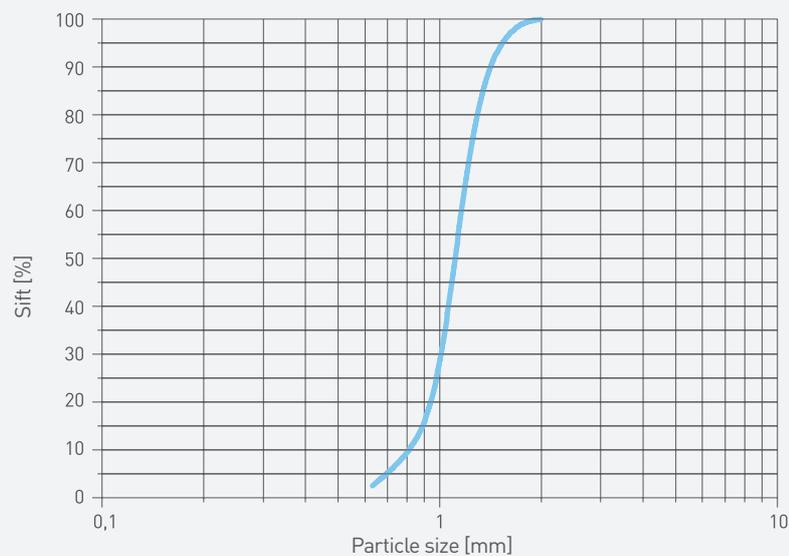

# ► Terazzo 2

## Characteristics

Terazzo is a granulated natural calcium carbonate used in building and construction industry. Along with distinguished optical properties and particle size distribution, Terazzo products boast excellent resistance to mechanical load and weather conditions.

### Physical characteristics

|                           |           |
|---------------------------|-----------|
| pH value (ISO 787/9)      | 9         |
| Moisture (ISO 787/2)      | max 0,2 % |
| Bulk density (ISO 787/11) | 1,4 g/ml  |
| Hardness by Mohs          | 3         |


### Chemical analysis

|                                |        |
|--------------------------------|--------|
| CaCO <sub>3</sub>              | 98 %   |
| Fe <sub>2</sub> O <sub>3</sub> | 0,01 % |
| SiO <sub>2</sub>               | 0,02 % |
| Loss of ignition               | 42,8 % |

### Particle size distribution

|           |          |
|-----------|----------|
| R 2,0 mm  | max 4 %  |
| R 1,25 mm | min 80 % |

T e r a z z o 2

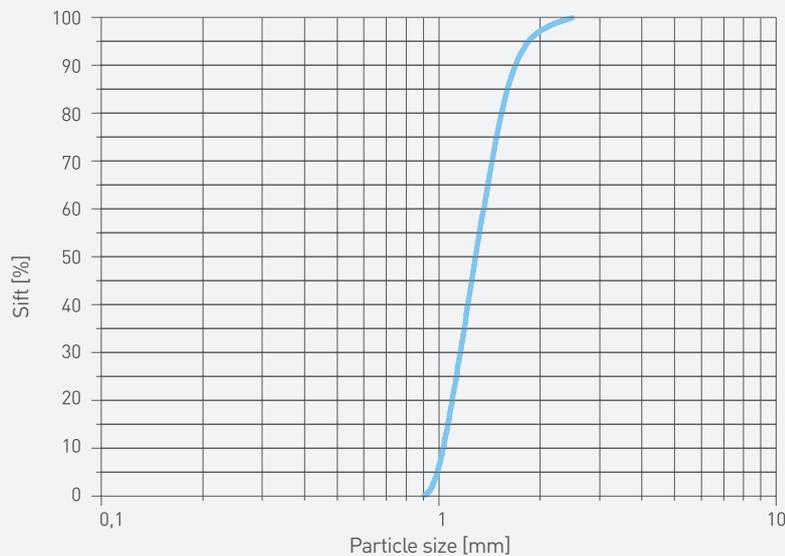

# ► Terazzo 2,5

## Characteristics

Terazzo is a granulated natural calcium carbonate used in building and construction industry. Along with distinguished optical properties and particle size distribution, Terazzo products boast excellent resistance to mechanical load and weather conditions.

### Physical characteristics

|                           |           |
|---------------------------|-----------|
| pH value (ISO 787/9)      | 9         |
| Moisture (ISO 787/2)      | max 0,2 % |
| Bulk density (ISO 787/11) | 1,4 g/ml  |
| Hardness by Mohs          | 3         |


### Chemical analysis

|                                |        |
|--------------------------------|--------|
| CaCO <sub>3</sub>              | 98 %   |
| Fe <sub>2</sub> O <sub>3</sub> | 0,01 % |
| SiO <sub>2</sub>               | 0,02 % |
| Loss of ignition               | 42,8 % |

### Particle size distribution

|          |           |
|----------|-----------|
| R 2,5 mm | max 2 %   |
| R 2,0 mm | 40 - 60 % |

Terazzo 2,5

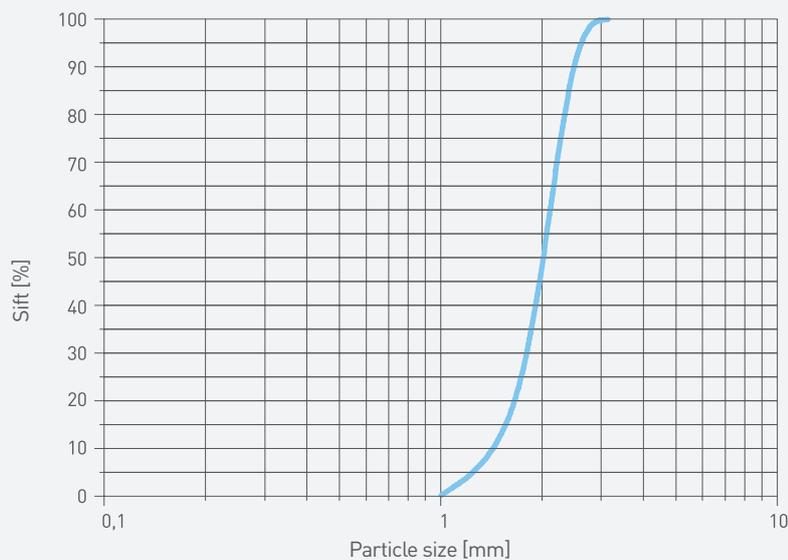

# ► Terazzo 3

## Characteristics

Terazzo is a granulated natural calcium carbonate used in building and construction industry. Along with distinguished optical properties and particle size distribution, Terazzo products boast excellent resistance to mechanical load and weather conditions.

### Physical characteristics


|                           |           |
|---------------------------|-----------|
| pH value (ISO 787/9)      | 9         |
| Moisture (ISO 787/2)      | max 0,2 % |
| Bulk density (ISO 787/11) | 1,4 g/ml  |
| Hardness by Mohs          | 3         |

### Chemical analysis

|                                |        |
|--------------------------------|--------|
| CaCO <sub>3</sub>              | 98 %   |
| Fe <sub>2</sub> O <sub>3</sub> | 0,01 % |
| SiO <sub>2</sub>               | 0,02 % |
| Loss of ignition               | 42,8 % |

### Particle size distribution

|           |           |
|-----------|-----------|
| R 3,15 mm | max 2 %   |
| R 2,5 mm  | 35 - 55 % |

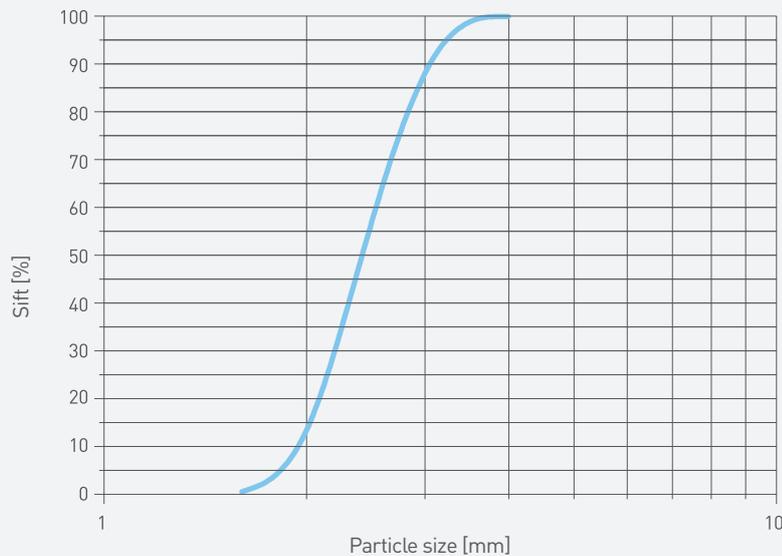

# ► Terazzo MM

## Characteristics

Terazzo MM is a granulated natural calcium carbonate used in glass industry, agriculture, feedstuff and building industry.

### Physical characteristics

|                           |           |
|---------------------------|-----------|
| pH value (ISO 787/9)      | 9         |
| Moisture (ISO 787/2)      | max 0,2 % |
| Bulk density (ISO 787/11) | 1,5 g/ml  |
| Hardness by Mohs          | 3         |

### Chemical analysis

|                                |            |
|--------------------------------|------------|
| CaCO <sub>3</sub>              | 98 %       |
| MgCO <sub>3</sub>              | 1,5 %      |
| Fe <sub>2</sub> O <sub>3</sub> | 0,02 %     |
| SiO <sub>2</sub>               | max 0,05 % |
| Insoluble in HCl               | 0,07 %     |
| Loss of ignition               | 42,8 %     |

### Particle size distribution

|          |          |
|----------|----------|
| R 1,0 mm | max 1 %  |
| R 0,1 mm | min 90 % |

T e r a z z o M M

